


TEC=LED

D O W N L I G H T S

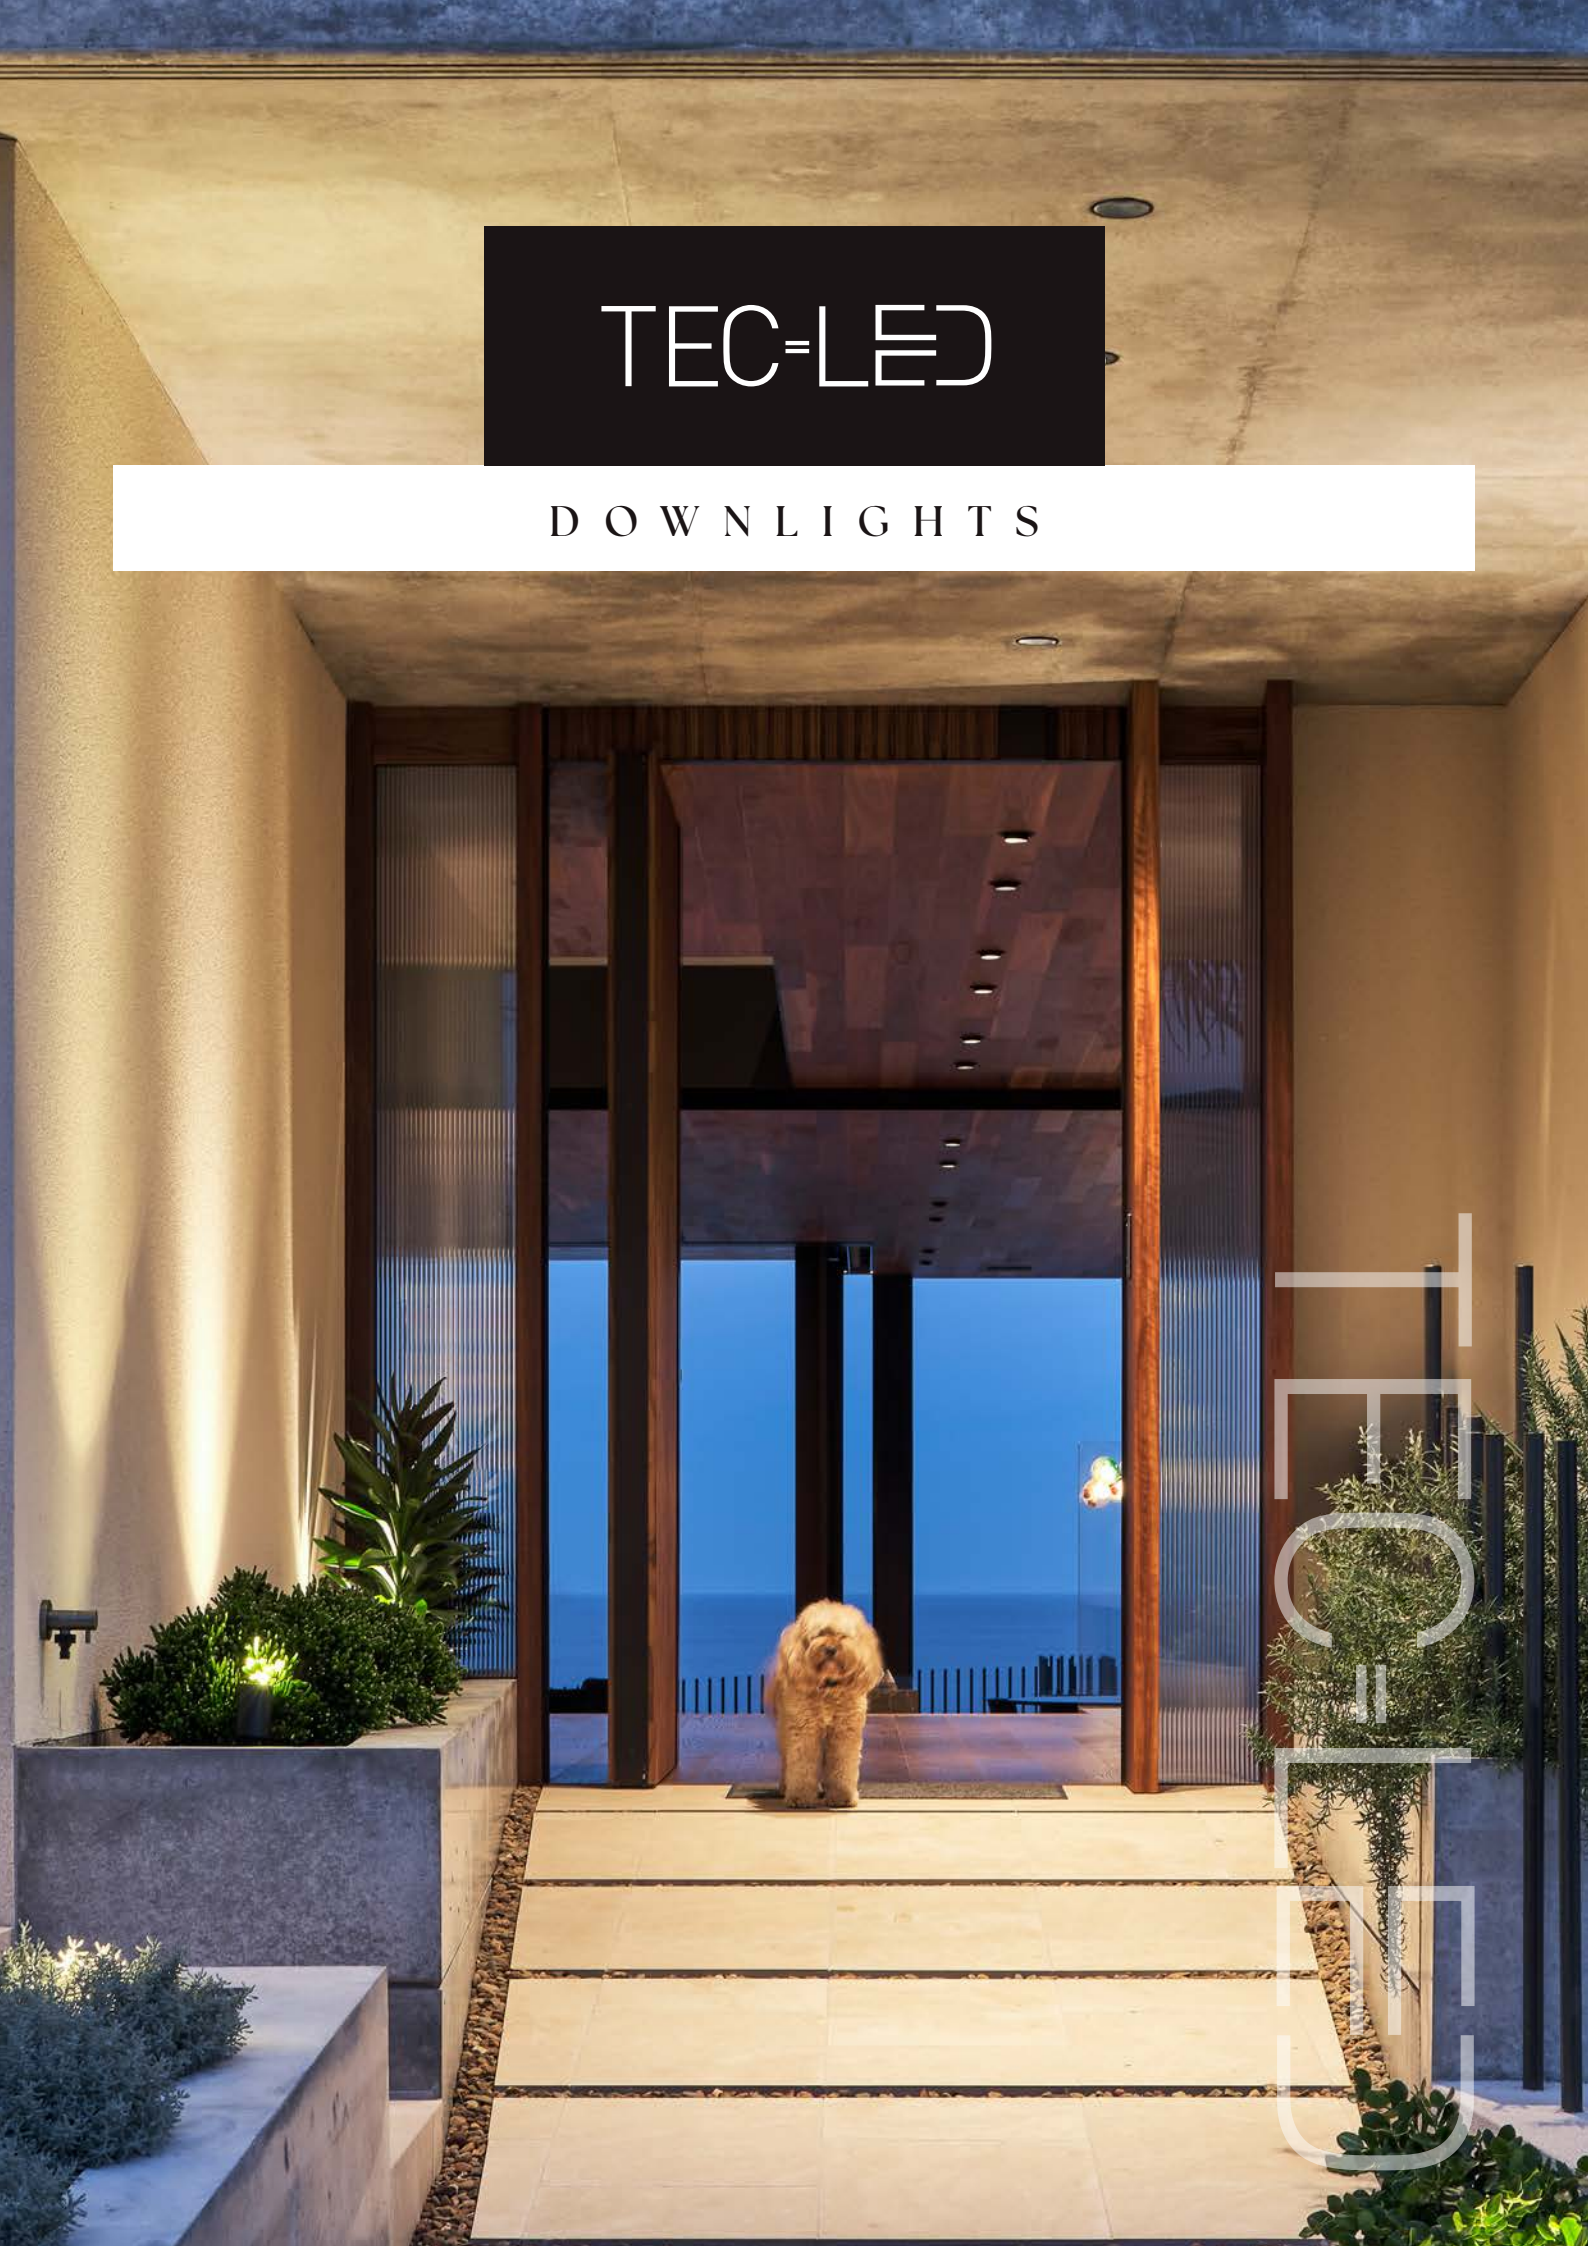

TEC=LED

RECESSED DOWNLIGHTS

MINI LOW GLARE



WATTS - LUMENS  3W - 150lms	DIMENSIONS Ø35 x 49mm	COLOURS  Black  White
CCT 2700K, 3000K	CUT-OUT Ø30mm	IP RATING IP20, IP44
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >90	BEAM ANGLE 24°, 38°, 60°

ALFIE



WATTS - LUMENS  10W - 1100lms 15W - 1500lms 20W - 2000lms 28W - 2800lms	DIMENSIONS 10W/15W: Ø95 x W 79mm 20W/28W: Ø130 x 103.55mm	COLOURS  Black  White  Silver
CCT 3000K, 4000K, 5000K	CUT-OUT 10W/15W: Ø90mm 20W/28W: Ø110mm	IP RATING IP20, IP44
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI 90	BEAM ANGLE 15°, 24°, 36°, 60°

MINI DEEP SERIES



WATTS - LUMENS  3W - 130lms 6W - 360lms 10W - 680lms	DIMENSIONS 3W: Ø29 x 68mm 6W: Ø39 x 73mm 10W: Ø49 x 88mm	COLOURS  Black  White
CCT 2700K, 3000K, 4000K, 6500K	CUT-OUT 3W: Ø25mm 6W: Ø35mm 10W: Ø45mm	IP RATING IP22
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >90	BEAM ANGLE 15°, 24°, 36°

BOOM



WATTS - LUMENS  5W - 500lms 10W - 1000lms 15W - 1400lms	DIMENSIONS 5W: Ø60 x 85mm 10W: Ø60 x 100mm 15W: Ø80 x 135mm	COLOURS  Black  White
CCT 2700K, 3000K, 4000K	CUT-OUT 5W/10W: Ø50-55mm 15W: Ø70-75mm	IP RATING IP44
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >90	BEAM ANGLE 15°, 24°, 38°

RECESSED DOWNLIGHTS

HOTEL SERIES



Pinhole (Circular or Oval)



Round



Spreader Lens

WATTS - LUMENS



10W - 900lms
15W - 1350lms
20W - 1800lms
25W - 2250lms

DIMENSIONS

10W - Ø65 x 75mm
15W - Ø85 x 85mm
20W - Ø106 x 114mm
25W - Ø106 x 114mm

COLOURS

● Black
○ White

INNER COLOURS

● Black
○ White
● Matte Silver
● Silver
● Chrome
● Golden

CCT

2700K, 3000K,
4000K, 5000K

CUT-OUT

10W - Ø55mm
15W - Ø75mm
20W/25W - Ø95mm

IP RATING

IP20

DIMMABLE

Triac, Dali, Casambi,
0-10V

CRI

>90

BEAM ANGLE

15°, 24°, 36°, 60°

PINHOLE FIXED & ADJUSTABLE



Fixed



Adjustable

WATTS - LUMENS



15W - 1100lms

DIMENSIONS

Ø85 x 89mm

COLOURS

● Black
○ White

CCT

2700K, 3000K, 4000K

CUT-OUT

Ø72mm

IP RATING

IP44

DIMMABLE

Triac, Dali, Casambi, 0-10V

CRI

>90

BEAM ANGLE

38°



RECESSED DOWNLIGHTS

CARIBA FIXED AND ADJUSTABLE



Fixed



Adjustable

WATTS - LUMENS  9W - 860lms 639lms (TriChip)	DIMENSIONS Ø100 x 60mm	COLOURS ● Black ○ White
CCT 2700K, 3000K, 4000K, TriChip	CUT-OUT Ø88mm-90mm	IP RATING IP54 (Fixed) IP20 (Adjustable)
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >80	BEAM ANGLE 40°, 60°

COLT



WATTS - LUMENS  13W - 850lms	DIMENSIONS Ø110 x 50.5mm	COLOURS ● Black ○ White
CCT TriChip (3000K, 4000K, 5000K)	CUT-OUT Ø90mm	IP RATING IP20
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >80	BEAM ANGLE 90°

PIRANHA FIXED AND ADJUSTABLE



WATTS - LUMENS  13W - 1122lms 17W - 1500lms	DIMENSIONS Ø100 x 105mm	COLOURS ● Black ○ White
CCT 2700K, 3000K, 4000K, 5000K, Sunset Dim	CUT-OUT Ø90-92mm	IP RATING IP44
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >90	BEAM ANGLE 15°, 24°, 36°, 60°

SQUARE PIRANHA



WATTS - LUMENS  13W - 1122lms 17W - 1500lms	DIMENSIONS 110 x 105mm	COLOURS ● Black ○ White
CCT 2700K, 3000K, 4000K, 5000K, 6000K	CUT-OUT 80 x 80mm	IP RATING IP44
DIMMABLE Triac, Dali, Casambi, 0-10V	CRI >90	BEAM ANGLE 15°, 24°, 36°, 60°

RECESSED DOWNLIGHTS

PRISTO

Ø55mm - Adjustable



Ø75mm Fixed or Adjustable



WATTS - LUMENS



Ø55mm:
9W - 845lms
13W - 1122lms

Ø75mm:
13W - 1122lms
17W - 1500lms

DIMENSIONS

Ø55mm:

9W: Ø68.5 x 88.5mm
13W: Ø68.5 x 103.5mm

Ø75mm Fixed:

13W: Ø86 x 116mm
17W: Ø86 x 126mm

Ø75mm Adjustable:

13W: Ø86 x 120mm
17W: Ø86 x 130mm

COLOURS

● Black
○ White

INNER COLOURS

● Black
○ White
● Chrome
● Gold

CCT

2700K, 3000K, 4000K,
Tunable White, Dim to Warm

CUT-OUT

Ø55mm or
Ø75mm

IP RATING

IP44

DIMMABLE

Triac, Dali, Casambi, 0-10V

CRI

>90

BEAM ANGLE

15°, 24°, 36°, 60°

Fixed, Deep Adjustable, Pinhole Circular, Pinhole Oval and Trimless options available.

LENS FILTER OPTIONS

OPTIONAL BAFFLE COLOURS:
AVAILABLE IN WHITE, BLACK,
CHROME, OR GOLD.



OPTIONAL FRAME COLOURS:
AVAILABLE IN WHITE & BLACK.

*OTHER POWDER-COATED COLOURS
AVAILABLE UPON REQUEST.

ACCESORIES



HONEYCOMB TO UPDATE
VISUALS



WATERPROOF
GLASSES TO RESIST
MOISTURE

LENS FILTER OPTIONS


1.5X5.0 oval




1.5X6.0 oval



1.5Xzoom



3Xzoom



SWITCH DOWNLIGHTS

ZELA RANGE

CCT
2400K, 2700K, 3000K, 4000K,
Sunset Dim, Tunable White

IP RATING
IP65

COLOURS

● Black
○ White

DIMMABLE
Triac, Dali, Casambi

CRI
>90
>95
>97

BEAM ANGLE

Lens - 9°, 15°, 20°
Honeycomb - 30°, 40°
Clear Glass - 40°, 55°
Prismatic - 40°, 55°
Opaque - 90°

ZELA FIXED



Lens



Honeycomb



Clear



Prismatic



Opaque

WATTS - LUMENS



4.3W - 400lms
6.4W - 580lms
7.7W - 670lms
9.4W - 780lms

DIMENSIONS

Ø65 x 43mm

CUT-OUT

Ø52-57mm
(min-max)

ZELA DEEP FIXED



Lens



Honeycomb



Clear



Prismatic



Opaque

WATTS - LUMENS



4.3W - 410lms
6.4W - 580lms
7.7W - 680lms
9.4W - 790lms
11.1W - 880lms

DIMENSIONS

Ø82 x 56mm

CUT-OUT

Ø73mm

ZELA TILT Z



Lens



Honeycomb



Clear



Prismatic



Opaque

WATTS - LUMENS



4.3W - 420lms
6.4W - 590lms
7.7W - 690lms
9.4W - 810lms
11.1W - 910lms
12.8W - 1020lms

DIMENSIONS

Ø82 x 50mm

CUT-OUT

Ø73mm

ZELA DEEP TILT Z



Lens



Honeycomb



Clear



Prismatic



Opaque

WATTS - LUMENS



6.4W - 590lms
7.7W - 690lms
9.4W - 810lms
11.1W - 910lms
12.8W - 1020lms

DIMENSIONS

Ø98 x 71mm

CUT-OUT

Ø89mm

ZELA OFFSET DEEP TILT Z



Lens



Honeycomb



Clear



Prismatic



Opaque

WATTS - LUMENS



6.4W - 590lms
7.7W - 690lms
9.4W - 810lms
11.1W - 920lms
12.8W - 1020lms

DIMENSIONS


Ø109 x 75mm

CUT-OUT

Ø100mm

SWITCH DOWNLIGHTS

ZELA TILTZ 2

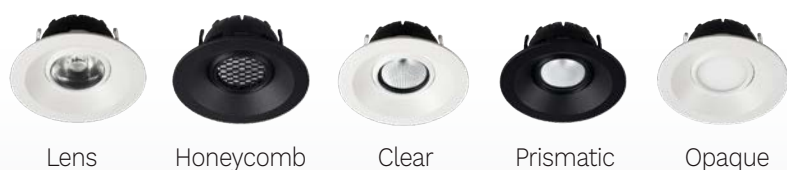

Lens

Honeycomb

Clear

Prismatic

Opaque

WATTS - LUMENS



4.3W - 400lms
6.4W - 570lms
7.7W - 660lms
9.4W - 780lms
11.1W - 880lms
12.8W - 1020lms

DIMENSIONS

Ø101 x 58mm

CUT-OUT

Ø83-89mm
(min-max)

ZELA DECOR



WATTS - LUMENS



4.3W - 310lms
6.4W - 440lms
7.7W - 510lms
9.4W - 600lms
11.1W - 680lms

DIMENSIONS

Ø65 x 67mm

COLOURS

● Black
○ White

BEAM ANGLE

Lens - 9°, 15°, 20°
Clear Glass - 30°, 40°

CUT-OUT

Ø30mm

INNER COLOURS

● Black
○ White
● Copper
● Gold
● Bronze



Zela Deep Tiltz

SWITCH DOWNLIGHTS

FIRE RATED RANGE

WATTS - LUMENS



4.3W - 420lms
6.4W - 590lms
7.7W - 690lms
9.4W - 810lms
11.1W - 920lms

CCT

2400K, 2700K, 3000K, 4000K,
Sunset Dim, Tunable White

IP RATING

IP65

COLOURS

● Black
○ White

DIMMABLE

Triac, Dali, Casambi

CRI

>90
>95
>97

BEAM ANGLE

Lens - 9°, 15°, 20°
Clear Glass - 40°, 55°
Prismatic - 40°, 55°
Opaque - 90°

ZELA FIRE RATED TILT Z



Lens



Clear



Prismatic



Opal

DIMENSIONS

Ø86 x 65mm

CUT-OUT

Ø73mm

ZELA FIRE RATED FIXED



Lens



Clear



Prismatic



Opal

DIMENSIONS

Ø70 x 50mm

CUT-OUT

Ø57mm

ZELA FIRE RATED DEEP FIXED



Lens



Clear



Prismatic



Opal

DIMENSIONS

Ø86 x 63mm

CUT-OUT

Ø73mm

TILT Z RANGE

TILT Z



WATTS - LUMENS



6.8W - 550lms
9.2W - 800lms
13.2W - 1000lms

DIMENSIONS

Ø100 x 45mm

COLOURS

● Black
○ White
● Silver

CCT

2400K, 2700K, 3000K,
4000K, Sunset Dim

CUT-OUT

Ø83-92mm

IP RATING

IP65

DIMMABLE

Triac, Dali, Casambi

CRI

>90
>97

BEAM ANGLE

Clear Glass - 20°, 40°, 60°
Prismatic - 20°, 40°, 60°
Opaque - 90°

DEEP TILT Z



WATTS - LUMENS



6.8W - 550lms
9.2W - 800lms
13.2W - 1000lms

DIMENSIONS

Ø101 x 66mm

COLOURS

● Black
○ White
● Silver

CCT

2400K, 2700K, 3000K,
4000K, Sunset Dim

CUT-OUT

Ø92mm

IP RATING

IP65

DIMMABLE

Triac, Dali, Casambi

CRI

>90
>97

BEAM ANGLE

Clear Glass - 20°, 40°, 60°
Prismatic - 20°, 40°, 60°
Opaque - 90°

SWITCH DOWNLIGHTS

MINI RANGE

THE MIGHTY MINI



WATTS - LUMENS



1W - 115lms
2.2W - 215lms

DIMENSIONS

Ø38 x 28mm

COLOURS

- Natural Anodized
- Black Anodized
- Stainless Steel
- Stainless Steel White

CCT

2700K, 3000K,
4000K

CUT-OUT

Ø32mm

Depth > 36mm

IP RATING

IP67

DIMMABLE

Triac, Dali, Casambi

CRI

>80

BEAM ANGLE

25°, 60°

THE MINI TILTZ



WATTS - LUMENS



2W - 210lms

DIMENSIONS

Ø36 x 31mm

COLOURS

- Natural Anodized
- Black Anodized
- Stainless Steel
- Stainless Steel White

CCT

2700K, 3000K,
4000K

CUT-OUT

Ø32mm

Depth 32mm

IP RATING

IP67

DIMMABLE

Triac, Dali, Casambi

CRI

>80

BEAM ANGLE

30°, 70°

MLIGHT



WATTS - LUMENS



3.5W - 290lms
5W - 400lms

DIMENSIONS

Ø54 x 33mm

Hole depth >40mm

COLOURS

- Natural Anodized
- Black Anodised
- White Anodised
- Stainless Steel
- Stainless Steel Black
- Copper

CCT

2700K, 3000K,
4000K

CUT-OUT

Ø44-46mm

IP RATING

IP67

DIMMABLE

Triac, Dali, Casambi

CRI

>80

BEAM ANGLE

22°, 38°, 45°

MINI SPRING



WATTS - LUMENS



1W - 90lms

DIMENSIONS

Ø30 x 18mm

COLOURS

- Natural Anodized
- Black Anodised
- Stainless Steel
- Stainless Steel White
- Copper

CCT

2700K, 3000K,
4000K

CUT-OUT

Ø20mm

Hole Depth 26mm

IP RATING

IP67

DIMMABLE

Triac, Dali, Casambi

CRI

>80

BEAM ANGLE

N/A

SWITCH DOWNLIGHTS

MINI FRICTION



WATTS - LUMENS



1W - 100lms

DIMENSIONS

Ø20 x 18mm

COLOURS

- Natural Anodized
- Black Anodised
- Stainless Steel
- Stainless Steel White
- Copper

CCT

2700K, 3000K, 4000K

CUT-OUT

Ø16mm
Hole Depth 26mm

IP RATING

IP67

DIMMABLE

Triac, Dali, Casambi

CRI

>80

BEAM ANGLE


30°, 70°



Mini Friction

RECESSED LINEAR

LINEAR WALL GRAZER

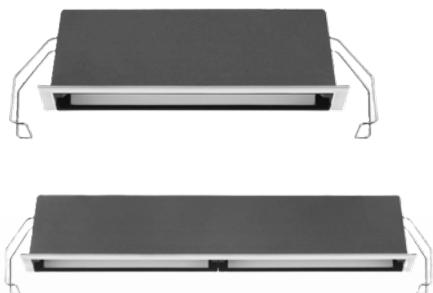

WATTS - LUMENS



10W - 800lms
20W - 1600lms

DIMENSIONS

10W: 147 x 45 x 54mm
20W: 280 x 45 x 54mm

COLOURS

- Black
- White

CCT

2700K, 3000K, 4000K, 5000K

CUT-OUT

10W: 140 x 37mm,
20W: 273 x 37mm

IP RATING

IP20

DIMMABLE

Triac, Dali, Casambi, 0-10V

CRI

>80

BEAM ANGLE

Wall Washer

MINI GRILL



WATTS - LUMENS



2x2W - 200lms
5x2W - 550lms
10x2W - 1150lms

DIMENSIONS

2x2W: 75 x 45 x 50mm
5x2W: 147 x 45 x 50mm
10x2W: 280 x 45 x 50mm

COLOURS

- Black
- White

CCT

2700K, 3000K, 4000K, 5000K

CUT-OUT

2x2W: 67 x 37mm
5x2W: 139 x 37mm
10x2W: 272 x 37mm

IP RATING

IP20

DIMMABLE

Triac, Dali, Casambi, 0-10V

CRI

>90

BEAM ANGLE

15°, 30°, 45°

RECESSED PULLDOWN ROUND SNOOT



7W



12W, 25W

WATTS - LUMENS



7W - 560lms
12W - 1080lms
25W - 2200lms

DIMENSIONS

7W: Ø80 x H123mm
12W: Ø100 x H113mm
25W: Ø130 x H129mm

COLOURS

● Black
○ White

CCT

2700K, 3000K,
4000K, 5000K,
6000K

CUT-OUT

7W: Ø70mm
12W: Ø90mm
25W: Ø115mm

IP RATING

IP44

DIMMABLE

Triac, Dali, Casambi,
0-10V

CRI

>90

BEAM ANGLE

12°, 24°, 38°, 60°



TWIN ROUND SNOOT



14W



24W, 50W

WATTS - LUMENS



14W - 1120lms
15W - 2160lms
25W - 4400lms

DIMENSIONS

14W: 140 x Ø80 x H123mm
24W: 185 x Ø100 x H113mm
50W: 238.5 x 124.5 x H142mm

COLOURS

● Black
○ White

CCT

2700K, 3000K,
4000K, 5000K,
6000K

CUT-OUT

14W: 130 x Ø68 mm
24W: 175 x Ø90mm
50W: 223 x Ø109mm

IP RATING

IP44

DIMMABLE


Triac, Dali, Casambi,
0-10V

CRI

>90

BEAM ANGLE

12°, 24°, 38°, 60°

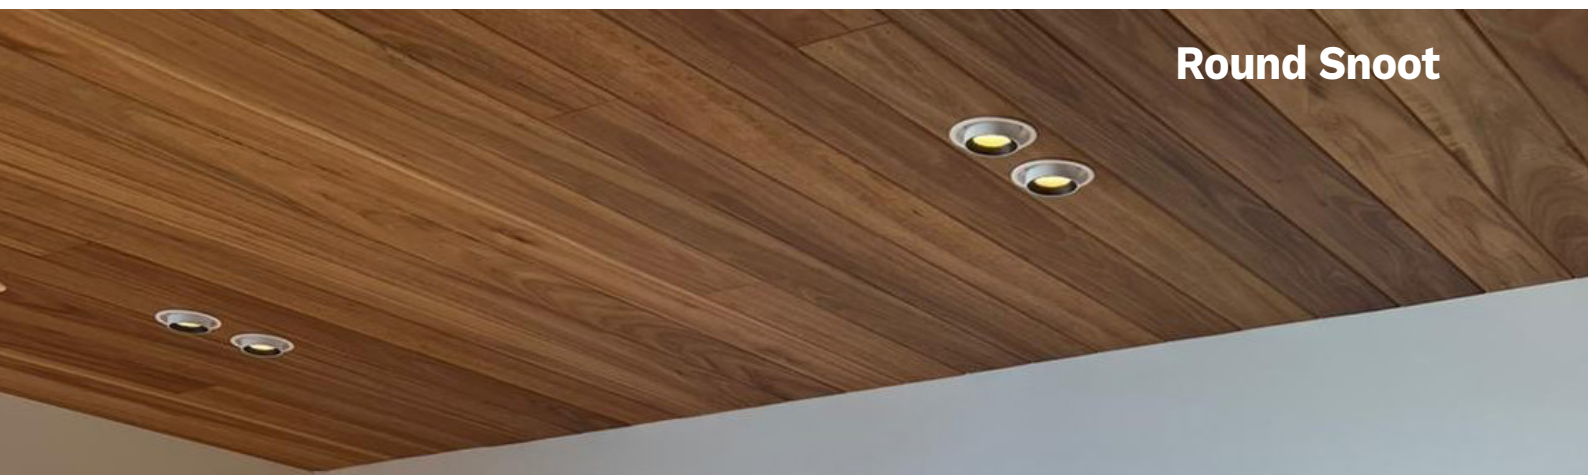

Round Snoot

Zela Offset Deep Tiltz



TEC=LED

TecLED Pty Ltd - Sydney Head Office

Unit 4, 61 - 71 Beauchamp Road,
Matraville NSW 2036

Telephone: (02) 9317 4177

Email: sales@tecled.com.au

TecLED Pty Ltd – Melbourne*

Level 1, 167-169 Moray Street,
South Melbourne VIC 3205

Telephone: (02) 9317 4177

Email: vic-sales@tecled.com.au

TecLED Pty Ltd – Gold Coast*

Telephone: 0425 298 712

***Showroom by appointment only**