

TEC=LED


OUTDOOR LIGHTS



AGED BRASS LIGHTS

MOUNT & SPIKE LIGHTS

LUMINATOR



WATTS - LUMENS

5W - 400lms
7W - 600lms

MATERIAL

Solid Brass,
Aluminium

COLOURS

Brass
Black

CCT

2700K, 3000K

MAX IP RATING


IP65

BEAM ANGLE

38°, 60°

- Thumb Screw on knuckle for easy field adjustment
- Double "O" Ring Seal for added moisture protection

LUMINATOR ADJUSTABLE



WATTS - LUMENS

5W - 400lms
7W - 600lms

MATERIAL

Solid Brass,
Aluminium

COLOURS

Brass
Black

CCT

2700K, 3000K

MAX IP RATING


IP65

BEAM ANGLE

38°, 60°

- 360° Rotatable Glare Guard
- Key Whole Screw on knuckle for easy field adjustment
- Double "O" Ring Seal for added moisture protection

LUMINATOR O



WATTS - LUMENS

5W - 400lms
7W - 600lms

MATERIAL

Solid Brass,
Aluminium

COLOURS

Brass
Black

CCT

2700K, 3000K

MAX IP RATING


IP65

BEAM ANGLE

38°, 60°

- Thumb Screw on knuckle for easy field adjustment
- Double "O" Ring Seal for added moisture protection

MINI LUMINATOR A

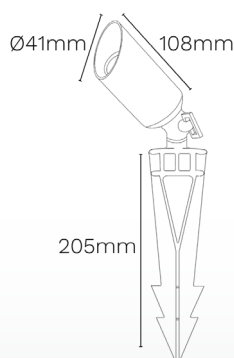

WATTS - LUMENS

3W - 300lms

MATERIAL

Solid Brass,
Aluminium

COLOURS

Brass
Black

CCT

2700K, 3000K

MAX IP RATING

IP65


BEAM ANGLE

38°, 60°

- Thumb Screw on knuckle for easy field adjustment
- Double "O" Ring Seal for added moisture protection

AGED BRASS LIGHTS

GARDEN DOUBLE ADJUSTABLE

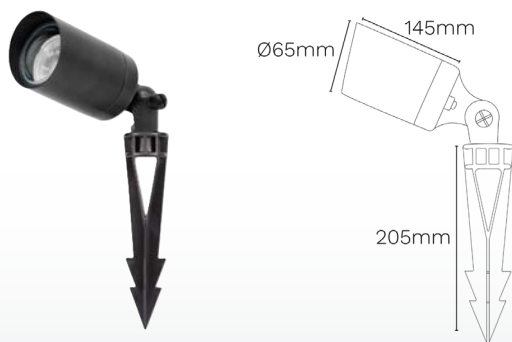

WATTS - LUMENS



3W - 300lms
5W - 400lms
7W - 600lms

MATERIAL

Solid Brass

COLOURS

● Black

CCT

2700K

MAX IP RATING

IP65

BEAM ANGLE

15°, 38°, 60°


- Replaceable COB module
- Three Beam angle settings (from inside): 15, 38, 60 degrees
- Three wattages settings (External adjust): 3W, 5W, 7W

PATH LIGHTS

PATHWEI



AVAILABLE EXTENSIONS

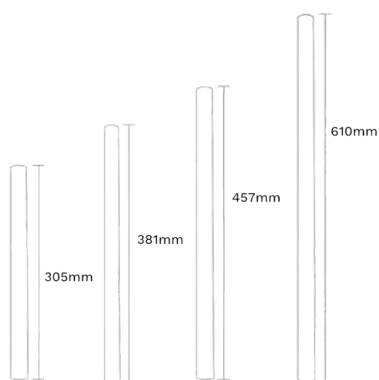

WATTS - LUMENS



3.5W - 230lms

MATERIAL

Solid Brass,
Aluminium

COLOURS

● Brass
● Black

CCT

2700K, 3000K

MAX IP RATING

IP65

BEAM ANGLE

360°

- Heat Resistant Glass Lens & Hub Assembly
- Multiple "O" Ring Seal for added moisture protection

SPECIAL FEATURES FOR SPIKE & PATH LIGHTS



OPTIONAL
MOUNTING BASE



OPTIONAL
EXTENSIONS



5 YEAR
WARRANTY




WEATHER
RESISTANT



AGED BRASS LIGHTS

STEP LIGHTS

LOVERLIGHT S



WATTS - LUMENS



S: 2W - 35lms
M: 4W - 75lms

MATERIAL

Solid Brass

COLOURS

Brass

CCT

2700K


MAX IP RATING

IP65


BEAM ANGLE

120°

LOVERLIGHT M

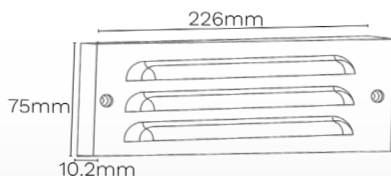

CLAMM



WATTS - LUMENS



3.5W - 300lms

MATERIAL

Solid Brass

COLOURS

Brass

CCT

2700K

MAX IP RATING


IP54

BEAM ANGLE

60°

WALL LIGHTS

BUNKAR



WATTS - LUMENS



2x3W - 2x275lms

MATERIAL

Solid Brass

COLOURS

Brass

CCT

3000K


MAX IP RATING

IP54

BEAM ANGLE

5-80°

COACHMAN



WATTS - LUMENS



6W - 600lms

MATERIAL

Solid Brass

COLOURS

Brass

CCT

2700K

MAX IP RATING

IP54


BEAM ANGLE

280°

WALL LIGHTS

STEP LIGHTS

LIGHTBAR 0.4W



WATTS - LUMENS



0.4W - 25lms
1.25W - 100lms
2.2W - 200lms

MATERIAL

Aluminium

COLOURS

● Brass

CCT
2700K


MAX IP RATING

IP54



BEAM ANGLE

90°


LIGHTBAR 1.25W



LIGHTBAR 2.2W

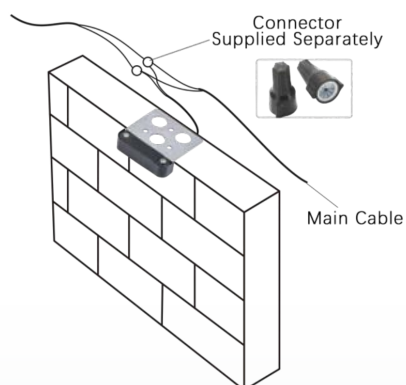

PIN BEAM

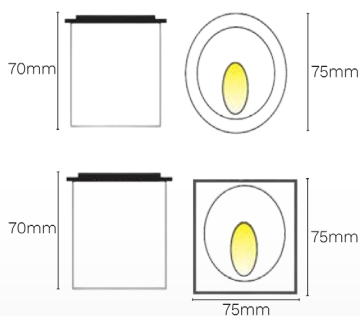

WATTS - LUMENS



3W - 67lms

MATERIAL

Aluminium

COLOURS

○ White

CCT
3000K

MAX IP RATING

IP65


BEAM ANGLE

40°



WALL LIGHTS

HAMILTON



WATTS - LUMENS



4W - 450lms

MATERIAL

Aluminium

COLOURS

● Charcoal
(Other colours available)

CCT

2700K, 3000K
4000K, 6000K


MAX IP RATING

IP54

BEAM ANGLE

120°

AUCKLAND

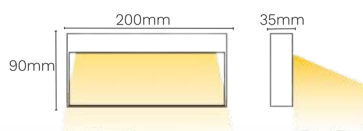

WATTS - LUMENS



4W - 450lms

MATERIAL

Aluminium

COLOURS

● Charcoal
(Other colours available)

CCT

2700K, 3000K
4000K, 6000K


MAX IP RATING

IP54

BEAM ANGLE

120°

WELLINGTON

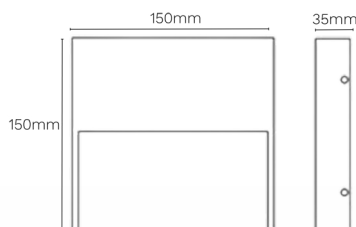

WATTS - LUMENS



3.3W - 350lms

MATERIAL

Aluminium

COLOURS

● Charcoal
(Other colours available)

CCT

2700K, 3000K
4000K, 6000K


MAX IP RATING

IP54

BEAM ANGLE

120°

NAPIER



WATTS - LUMENS



3W - 350lms

MATERIAL

Aluminium

COLOURS

● Charcoal
(Other colours available)

CCT

2700K, 3000K
4000K, 6000K

MAX IP RATING

IP54


BEAM ANGLE

120°

WALL LIGHTS

WALL LIGHTS

FYRBOX / L

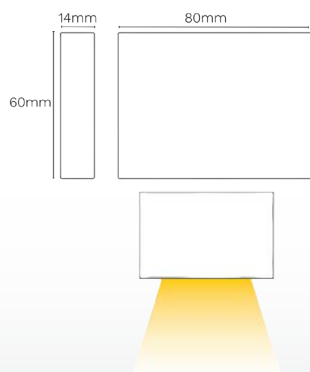

WATTS - LUMENS

3W - 250lms

MATERIAL

Stainless Steel,
Solid Brass

COLOURS

● Black
○ White
● Brass

CCT

3000K, 5500K


MAX IP RATING

IP65

BEAM ANGLE

120°

FYRBOX / P

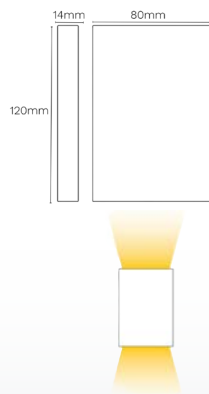

WATTS - LUMENS

2x3W - 2x250lms

MATERIAL

Stainless Steel,
Solid Brass

COLOURS

● Black
○ White
● Brass

CCT

3000K, 5500K


MAX IP RATING

IP65

BEAM ANGLE

120°

GUARDA



WATTS - LUMENS

2x5W - 2x310lms

MATERIAL

Aluminium

COLOURS

● Black
○ White

CCT

3000K, 4000K,
5500K


MAX IP RATING

IP54

BEAM ANGLE

120°

LUCERNE

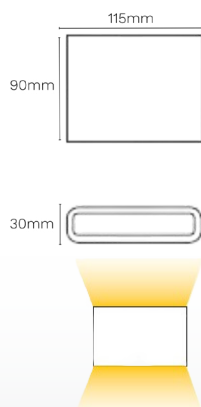

WATTS - LUMENS

2x3W - 2x187lms

MATERIAL

Aluminium

COLOURS

● Black
○ White

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP54

BEAM ANGLE

120°

WALL LIGHTS

MOUNTED UP/DOWN



WATTS - LUMENS



2x7W - 2x595lms

MATERIAL

Aluminium,
Solid Brass,
Copper,
Stainless Steel

COLOURS

- Black
- White
- Brass
- Copper
- Natural Anodised
- Stainless Steel

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP65

BEAM ANGLE

38°, 60°

MOUNTED SINGLE ADJUSTABLE UP/DOWN



WATTS - LUMENS



7W - 595lms

MATERIAL

Aluminium,
Solid Brass,
Copper,
Stainless Steel

COLOURS

- Black
- White
- Brass
- Copper
- Natural Anodised
- Stainless Steel

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP65

BEAM ANGLE

38°, 60°

MOUNTED DOUBLE ADJUSTABLE UP/DOWN



WATTS - LUMENS



2x7W - 2x595lms

MATERIAL

Aluminium,
Solid Brass,
Copper,
Stainless Steel

COLOURS

- Black
- White
- Brass
- Copper
- Natural Anodised
- Stainless Steel

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP65

BEAM ANGLE

60°

MICHIGAN



WATTS - LUMENS



2x5W - 2x230lms

MATERIAL

Aluminium

COLOURS

- Black
- White

CCT

3000K, 4000K,
5500K

MAX IP RATING


IP54

BEAM ANGLE

60°

WALL LIGHTS

SLED DOUBLE UP AND DOWN

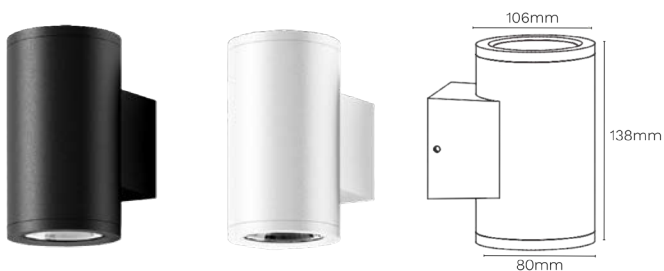

WATTS - LUMENS

11.1W - 740lms

MATERIAL

Aluminium

COLOURS

● Black
○ White

CCT

2700K, 3000K

MAX IP RATING

IP65

BEAM ANGLE

15°, 30°
45°, 60°

SLED DOWN



WATTS - LUMENS

6.4W - 450lms

MATERIAL

Aluminium

COLOURS

● Black
○ White

CCT

2700K, 3000K


MAX IP RATING

IP65

BEAM ANGLE

15°, 30°
45°, 60°

BUZZ

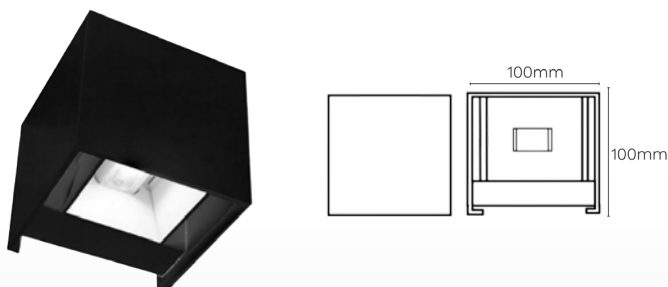

WATTS - LUMENS

2x3W - 550lms

MATERIAL

Aluminium

COLOURS

● Black
○ White

CCT

3000K


MAX IP RATING

IP54

BEAM ANGLE

5-80°

SENSOR SPOT LIGHT

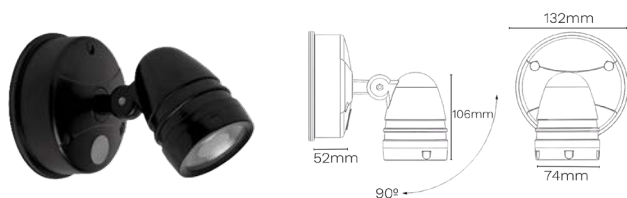

WATTS - LUMENS

Single: 15W - 1275lms
Double: 2x15W - 2x1275lms

MATERIAL

Polycarbonate

COLOURS

● Black
○ White

CCT

3000K, 4000K,
5500K


MAX IP RATING

IP65

BEAM ANGLE


120°

SENSOR TWIN SPOT LIGHT

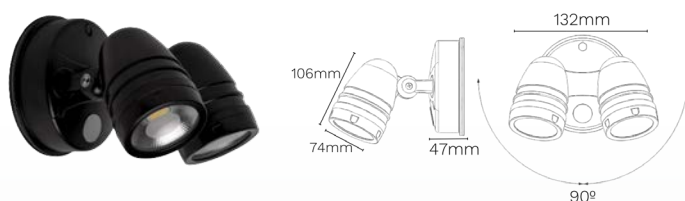

ABOVE GROUND LIGHTS

GARDEN STALC

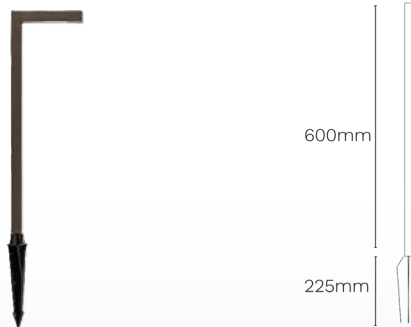

WATTS - LUMENS

7W - 500lms

MATERIAL

Aluminium,
Stainless Steel,
Solid Brass

COLOURS

- Black
- Stainless Steel
- Brass

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP54

BEAM ANGLE

120°

PILLAR

Cut Options:


Corner Cut



Straight Cut



600mm
or
1100mm

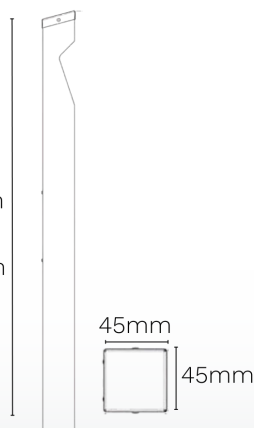

WATTS - LUMENS

600mm:

1W - 115lms

1100mm:

3W - 310lms
4.2W - 320lms

MATERIAL

Natural timber
with copper

COLOURS

- Clear lacquer
natural timber

CCT

2700K, 3000K,
4000K


MAX IP RATING

IP67

BEAM ANGLE

Wide

PATH LIGHT, SPIKE MOUNT

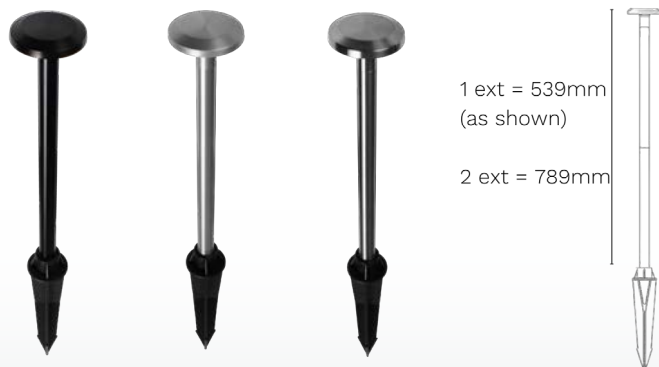

WATTS - LUMENS

1W - 68lms
2.2W - 125lms

MATERIAL

Aluminium,
Stainless Steel

COLOURS

- Black
- Natural Anodised
- Stainless Steel

CCT

2700K, 3000K,
4000K

MAX IP RATING

IP65

BEAM ANGLE

115°

GARDEN SPOT LIGHT, SPIKE OR SURFACE MOUNT



WATTS - LUMENS

3W - 300lms
5W - 500lms
9W - 900lms
15W - 1400lms

MATERIAL

Aluminium

COLOURS

- Black
- Silver

CCT

2700K, 3000K,
4000K, 6000K,
RGBW

MAX IP RATING

IP65


BEAM ANGLE

15°, 24°, 36°, 50°
*Honeycomb
available

*Optional hood available.

ABOVE GROUND LIGHTS

GARDEN SPOT LIGHT MR16

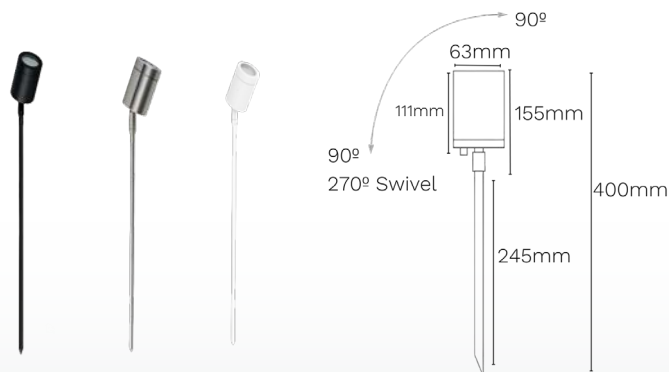

WATTS - LUMENS

5W - 270lms

MATERIAL

Aluminium,
Stainless Steel,
Solid Copper

COLOURS

- Black
- White
- Copper
- Stainless Steel

CCT

3000K, 4000K,
5500K

MAX IP RATING

IP65

BEAM ANGLE

120°

MINI SPOT LIGHT, SPIKE OR SURFACE MOUNT



WATTS - LUMENS

1W - 115lms
2.2W - 215lms

MATERIAL

Aluminium,
Stainless Steel

COLOURS

- Black Anodised
- Natural Anodised
- Stainless Steel

CCT

2700K, 3000K,
4000K

MAX IP RATING

IP67

BEAM ANGLE

30°, 70°

SPIKE CLASSIC - FOR MINI DOWNLIGHTS AND MINI SPOT LIGHTS



MATERIAL

Aluminium,
Stainless Steel,
Solid Copper


COLOURS

- Black Anodised
- Natural Anodised
- Stainless Steel
- Copper



ABOVE GROUND LIGHTS

MINI BOLLARD

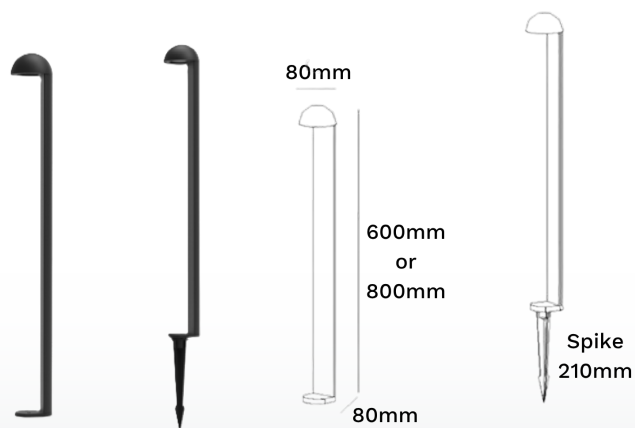

WATTS - LUMENS



5.8W - 251lms

MATERIAL

Aluminium

COLOURS

● Black

CCT

2700K, 3000K


MAX IP RATING

IP65

VOLTAGE

220-240V

ADJUSTABLE MINI STALC

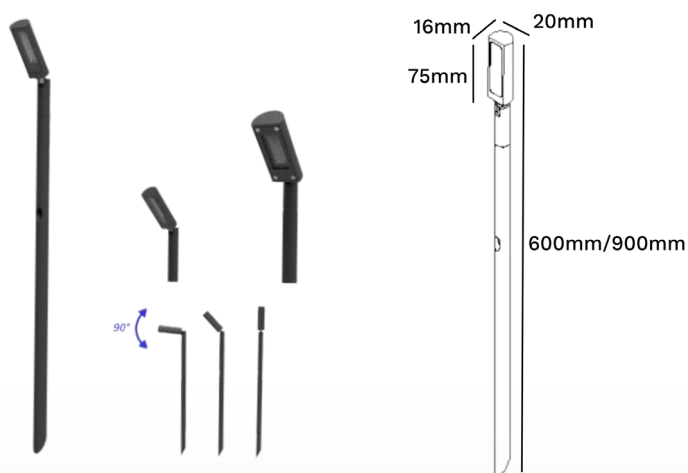

WATTS - LUMENS



1.2W - 78lms

MATERIAL

Aluminium

COLOURS

● Black

CCT

2700K, 3000K

MAX IP RATING

IP65

VOLTAGE

24V



MUSHROOM



WATTS - LUMENS



4W - 280lms

MATERIAL

Aluminium

COLOURS

● Black

CCT


2700K, 3000K

MAX IP RATING

IP65

VOLTAGE

24V

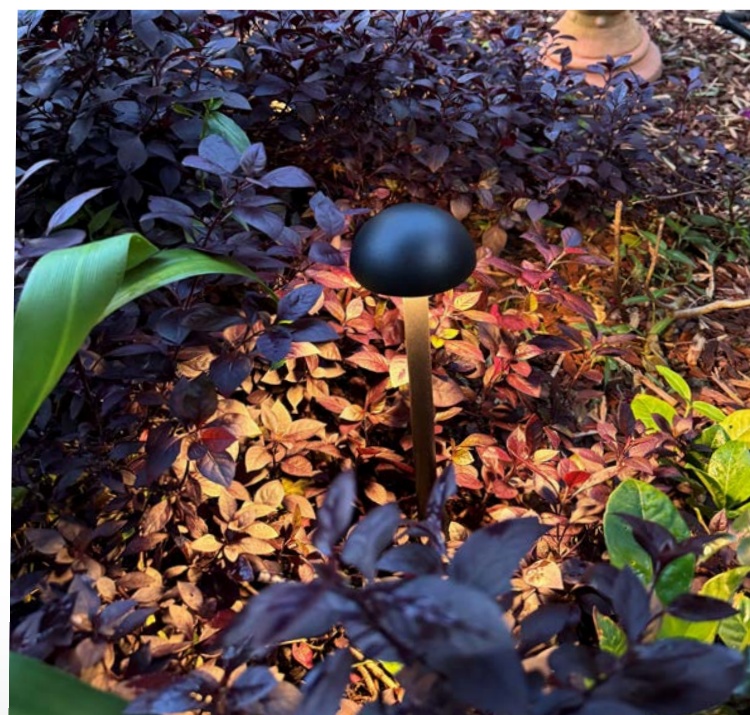

ABOVE GROUND LIGHTS

TINY REED



WATTS - LUMENS

 0.6W - 40lms

MATERIAL

Stainless Steel + Opal

COLOURS

● Black

CCT

2700K, 3000K

MAX IP RATING


IP65

VOLTAGE

24V



REED

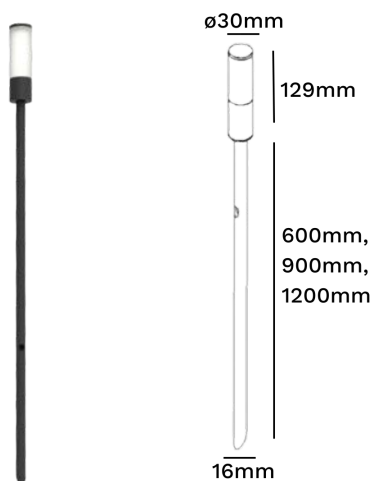

WATTS - LUMENS

 1.2W - 40lms
2.5W - 80lms

MATERIAL

Aluminium

COLOURS

● Black

CCT

2700K, 3000K

MAX IP RATING

IP65

VOLTAGE

24V




TREE LIGHTS

HIGH POWER FLEXIBLE TREE GRAZER





*3 modules, 18W


Top Bend

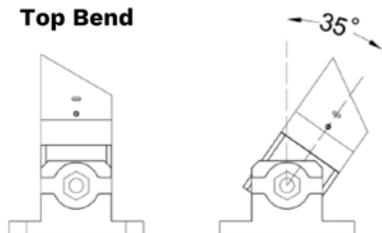


Side Bend

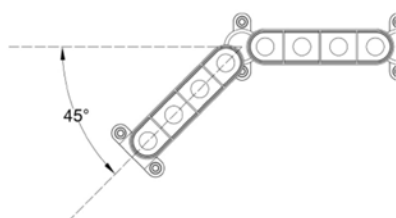


Asymmetric Louver



Symmetric Louver



Standard Symmetric Louver



*Mounting on tree or ground.

WATTS - LUMENS



6W - 540lms
per module

MATERIAL

Aluminium

COLOURS

- Black
- White
- Grey

CCT

2700K, 3000K,
3500K, 4000K,
5000K, 5700K,
6500K

MAX IP RATING

IP66

VOLTAGE


24V

OPTICS

15°, 25°, 35°, 45°, 15°x45°

OPTIONAL

Asymmetric Louver
High Symmetric Louver
Standard Symmetric Louver

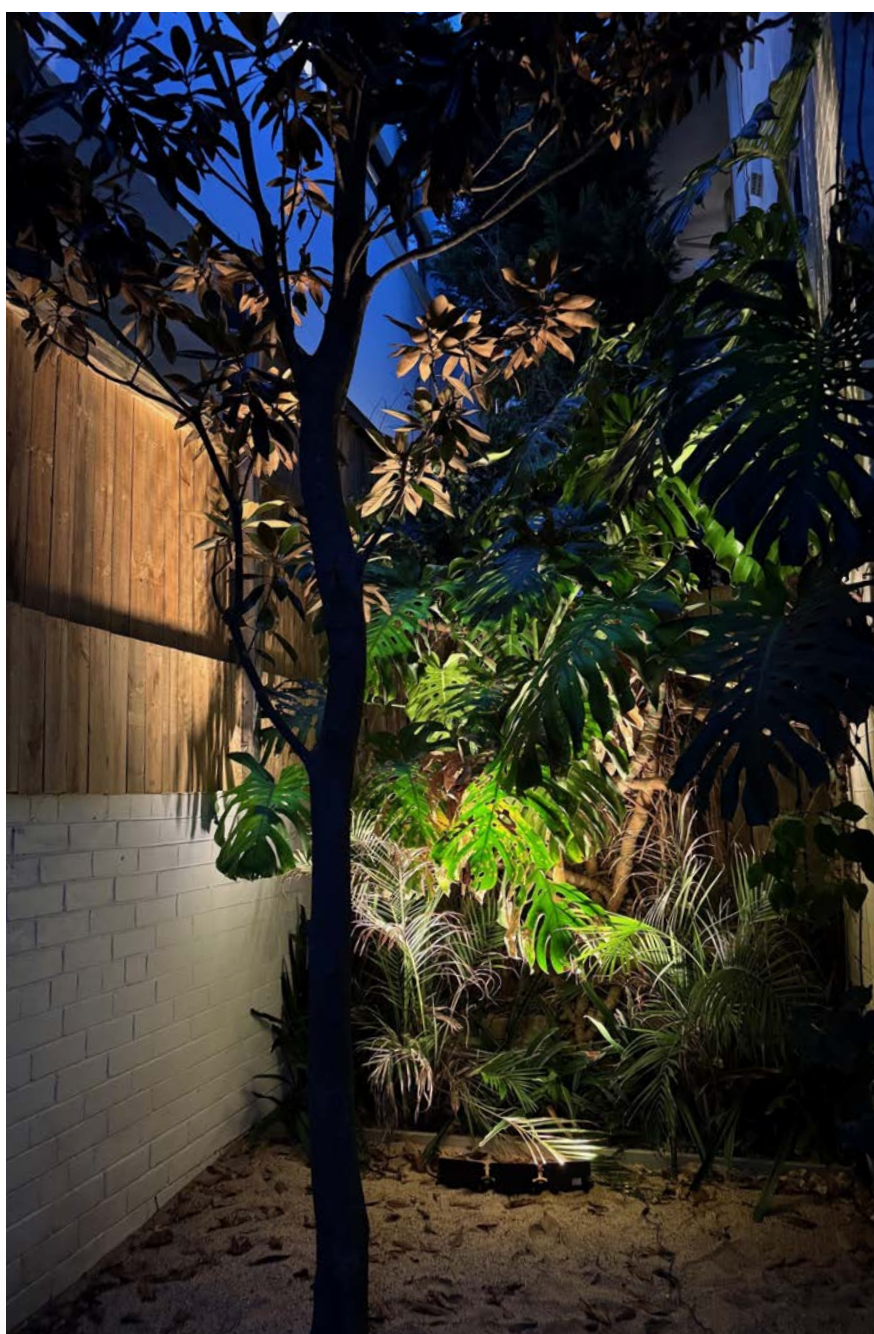

TREE LIGHTS

REGULAR FLEXIBLE TREE GRAZER



WATTS - LUMENS



45W - 2925lms
per 1.2M

MATERIAL
Polycarbonate

COLOURS

● Black

CCT


2700K, 3000K,
3500K, 4000K,
6500K

MAX IP RATING


IP67

VOLTAGE



24V



Side Bending




Top Bending

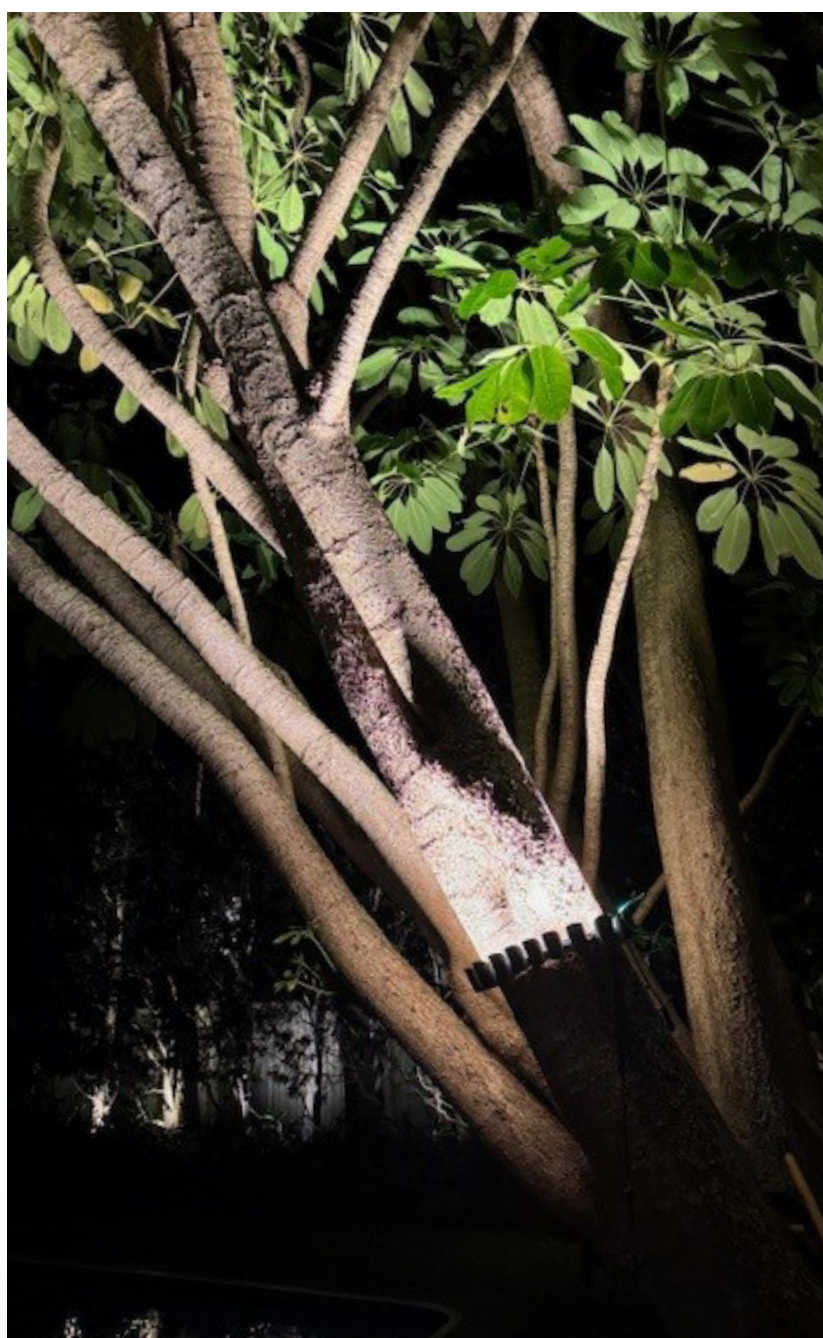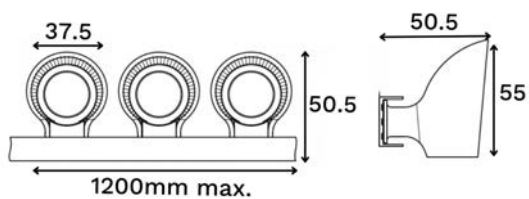

*Tree mount only.

SPOT LIGHTS

MINI SPRING



WATTS - LUMENS

1W - 90lms

MATERIAL

Aluminium,
Stainless Steel,
Solid Copper

COLOURS

- Natural Anodised
- Black Anodised
- Copper
- Stainless Steel
- White Stainless Steel

CCT

2700K, 3000K,
4000K


MAX IP RATING

IP67

BEAM ANGLE

30°, 70°

MINI FRICTION

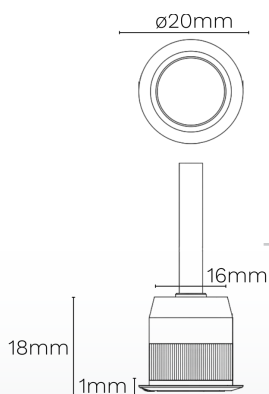

WATTS - LUMENS

1W - 100lms

MATERIAL

Aluminium,
Stainless Steel,
Solid Copper

COLOURS

- Natural Anodised
- Black Anodised
- Copper
- Stainless Steel
- White Stainless Steel

CCT

2700K, 3000K,
4000K


MAX IP RATING

IP67

BEAM ANGLE

30°, 70°

MLIGHT

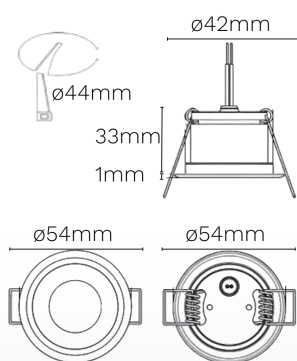

WATTS - LUMENS

3.5W - 290lms
5W - 400lms

MATERIAL

Aluminium,
Stainless Steel,
Solid Copper

COLOURS

- Natural Anodised
- Black Anodised
- Copper
- Stainless Steel
- White Stainless Steel
- Black Stainless Steel

CCT

2700K, 3000K,
4000K

MAX IP RATING

IP67


BEAM ANGLE

22°, 38°, 45°



SPOT LIGHTS

THE MIGHTY MINI



WATTS - LUMENS



1W - 115lms
2.2W - 215lms

MATERIAL

Aluminium,
Stainless Steel

COLOURS

- Natural Anodised
- Black
- Stainless Steel
- White Stainless Steel

CCT

2700K, 3000K,
4000K


MAX IP RATING

IP67

BEAM ANGLE

25°, 60°

THE MINI TILTZ



WATTS - LUMENS



2W - 210lms

MATERIAL

Aluminium,
Stainless Steel

COLOURS

- Natural Anodised
- Black
- Stainless Steel
- White Stainless Steel

CCT


2700K, 3000K,
4000K

MAX IP RATING

IP67

BEAM ANGLE

30°, 70°

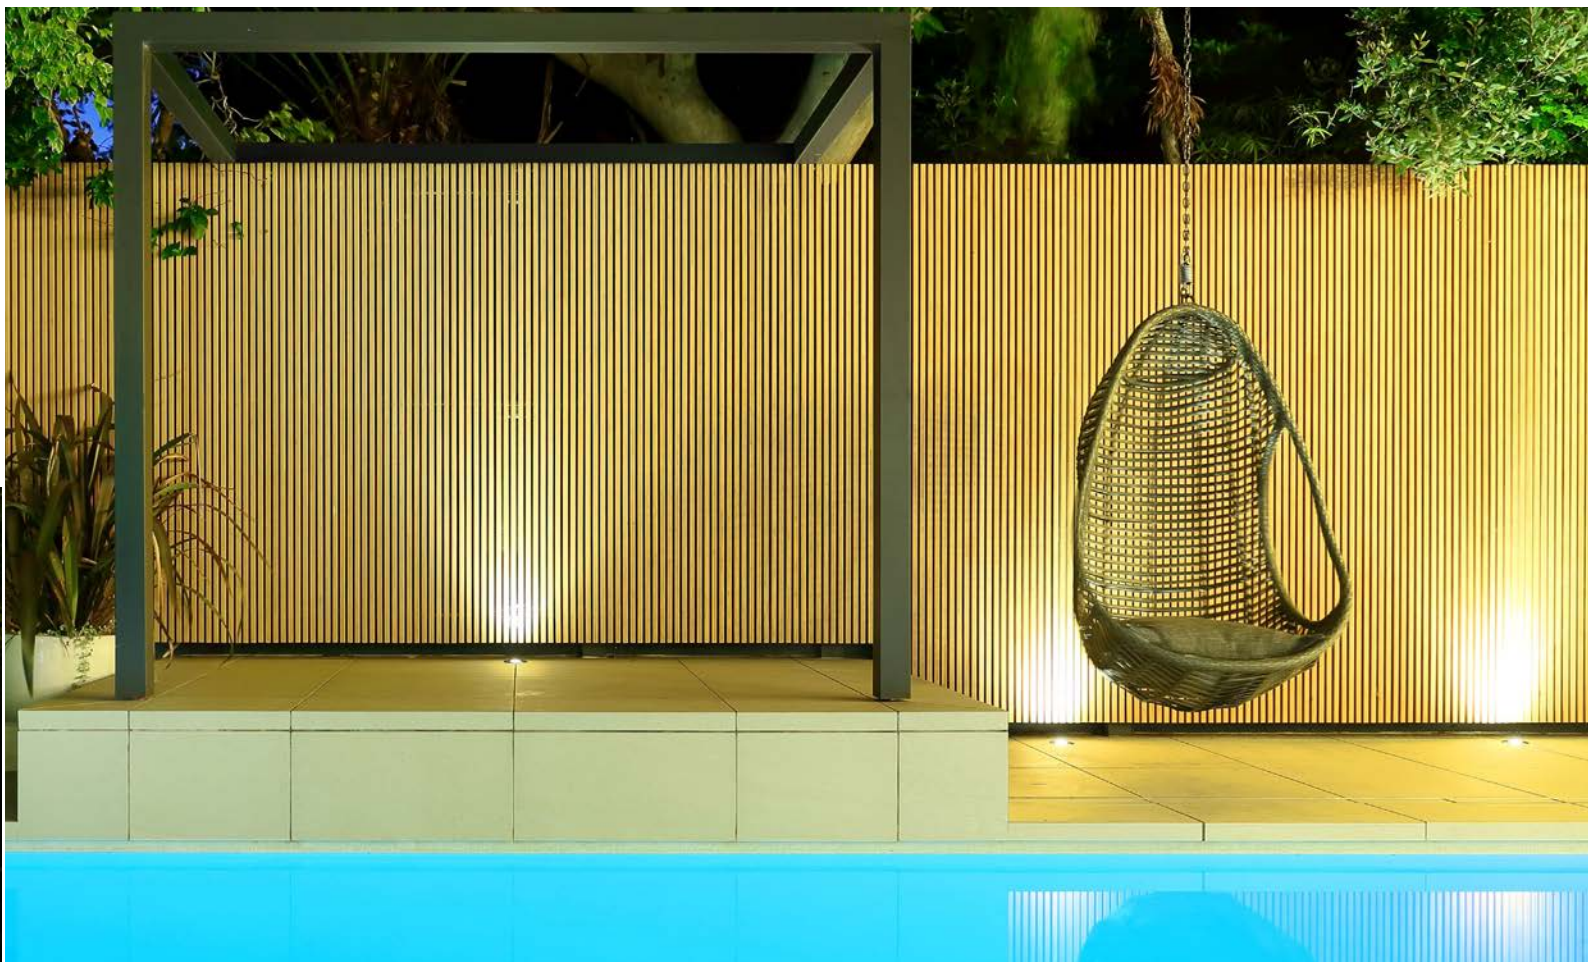


INGROUND LIGHTS

CIRCULAR RECESSED

3W & 5W

10W

Mounting



WATTS - LUMENS



3W - 160lms
5W - 450lms
10W - 800lms
18W - 1440lms

MATERIAL
Aluminium

COLOURS

● Satin Anodised

CCT

2700K, 3000K,
4000K, 6000K

MAX IP RATING

IP67

BEAM ANGLE

15°, 24°, 36°, 60°




*Honeycomb
available

INGROUND ADJUSTABLE



3W: Ø95mm
5W: Ø130mm
10W: Ø130mm
15W: Ø160mm

3W: 116mm
5W: 133mm
10W: 133mm
15W: 153mm



WATTS - LUMENS



3W - 140lms
5W - 400lms
10W - 800lms
15W - 1200lms

MATERIAL
Aluminium

COLOURS

● Satin Anodised

CCT

2700K, 3000K,
4000K, 6000K

MAX IP RATING

IP67



BEAM ANGLE

Only 3W: 5°, 8°
All: 18°, 24°, 36°, 60°



*Honeycomb
available

RIGID INGROUND 10W



WATTS - LUMENS



10W - 800lms

MATERIAL
Aluminium

COLOURS

Satin Anodised
Standard Powder
Coated Special Powder
Coated Standard Plated
Aged Plated

CCT

2400K, 2700K,
3000K, 3500K,
4000K



MAX IP RATING

IP67



BEAM ANGLE

120°

RIGID INGROUND 10W DEEP





RIGID INGROUND 10W WINGS



INGROUND LIGHTS

RIGID INGROUND 15W



WATTS - LUMENS



15W - 1200lms

MATERIAL

Aluminium

COLOURS

Satin Anodised
Standard Powder
Coated Special Powder
Coated Standard Plated
Aged Plated

CCT

2400K, 2700K,
3000K, 3500K,
4000K



MAX IP RATING

IP67



BEAM ANGLE

120°



RIGID INGROUND 15W DEEP



RIGID INGROUND 15W WINGS



RIGID INGROUND 20W DEEP



WATTS - LUMENS



20W - 1600lms

MATERIAL

Aluminium

COLOURS

Satin Anodised
Standard Powder
Coated Special Powder
Coated Standard Plated
Aged Plated

CCT

2400K, 2700K,
3000K, 3500K,
4000K




MAX IP RATING


IP67

BEAM ANGLE

120°

RIGID INGROUND 20W WINGS

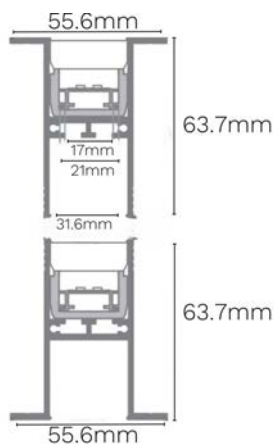

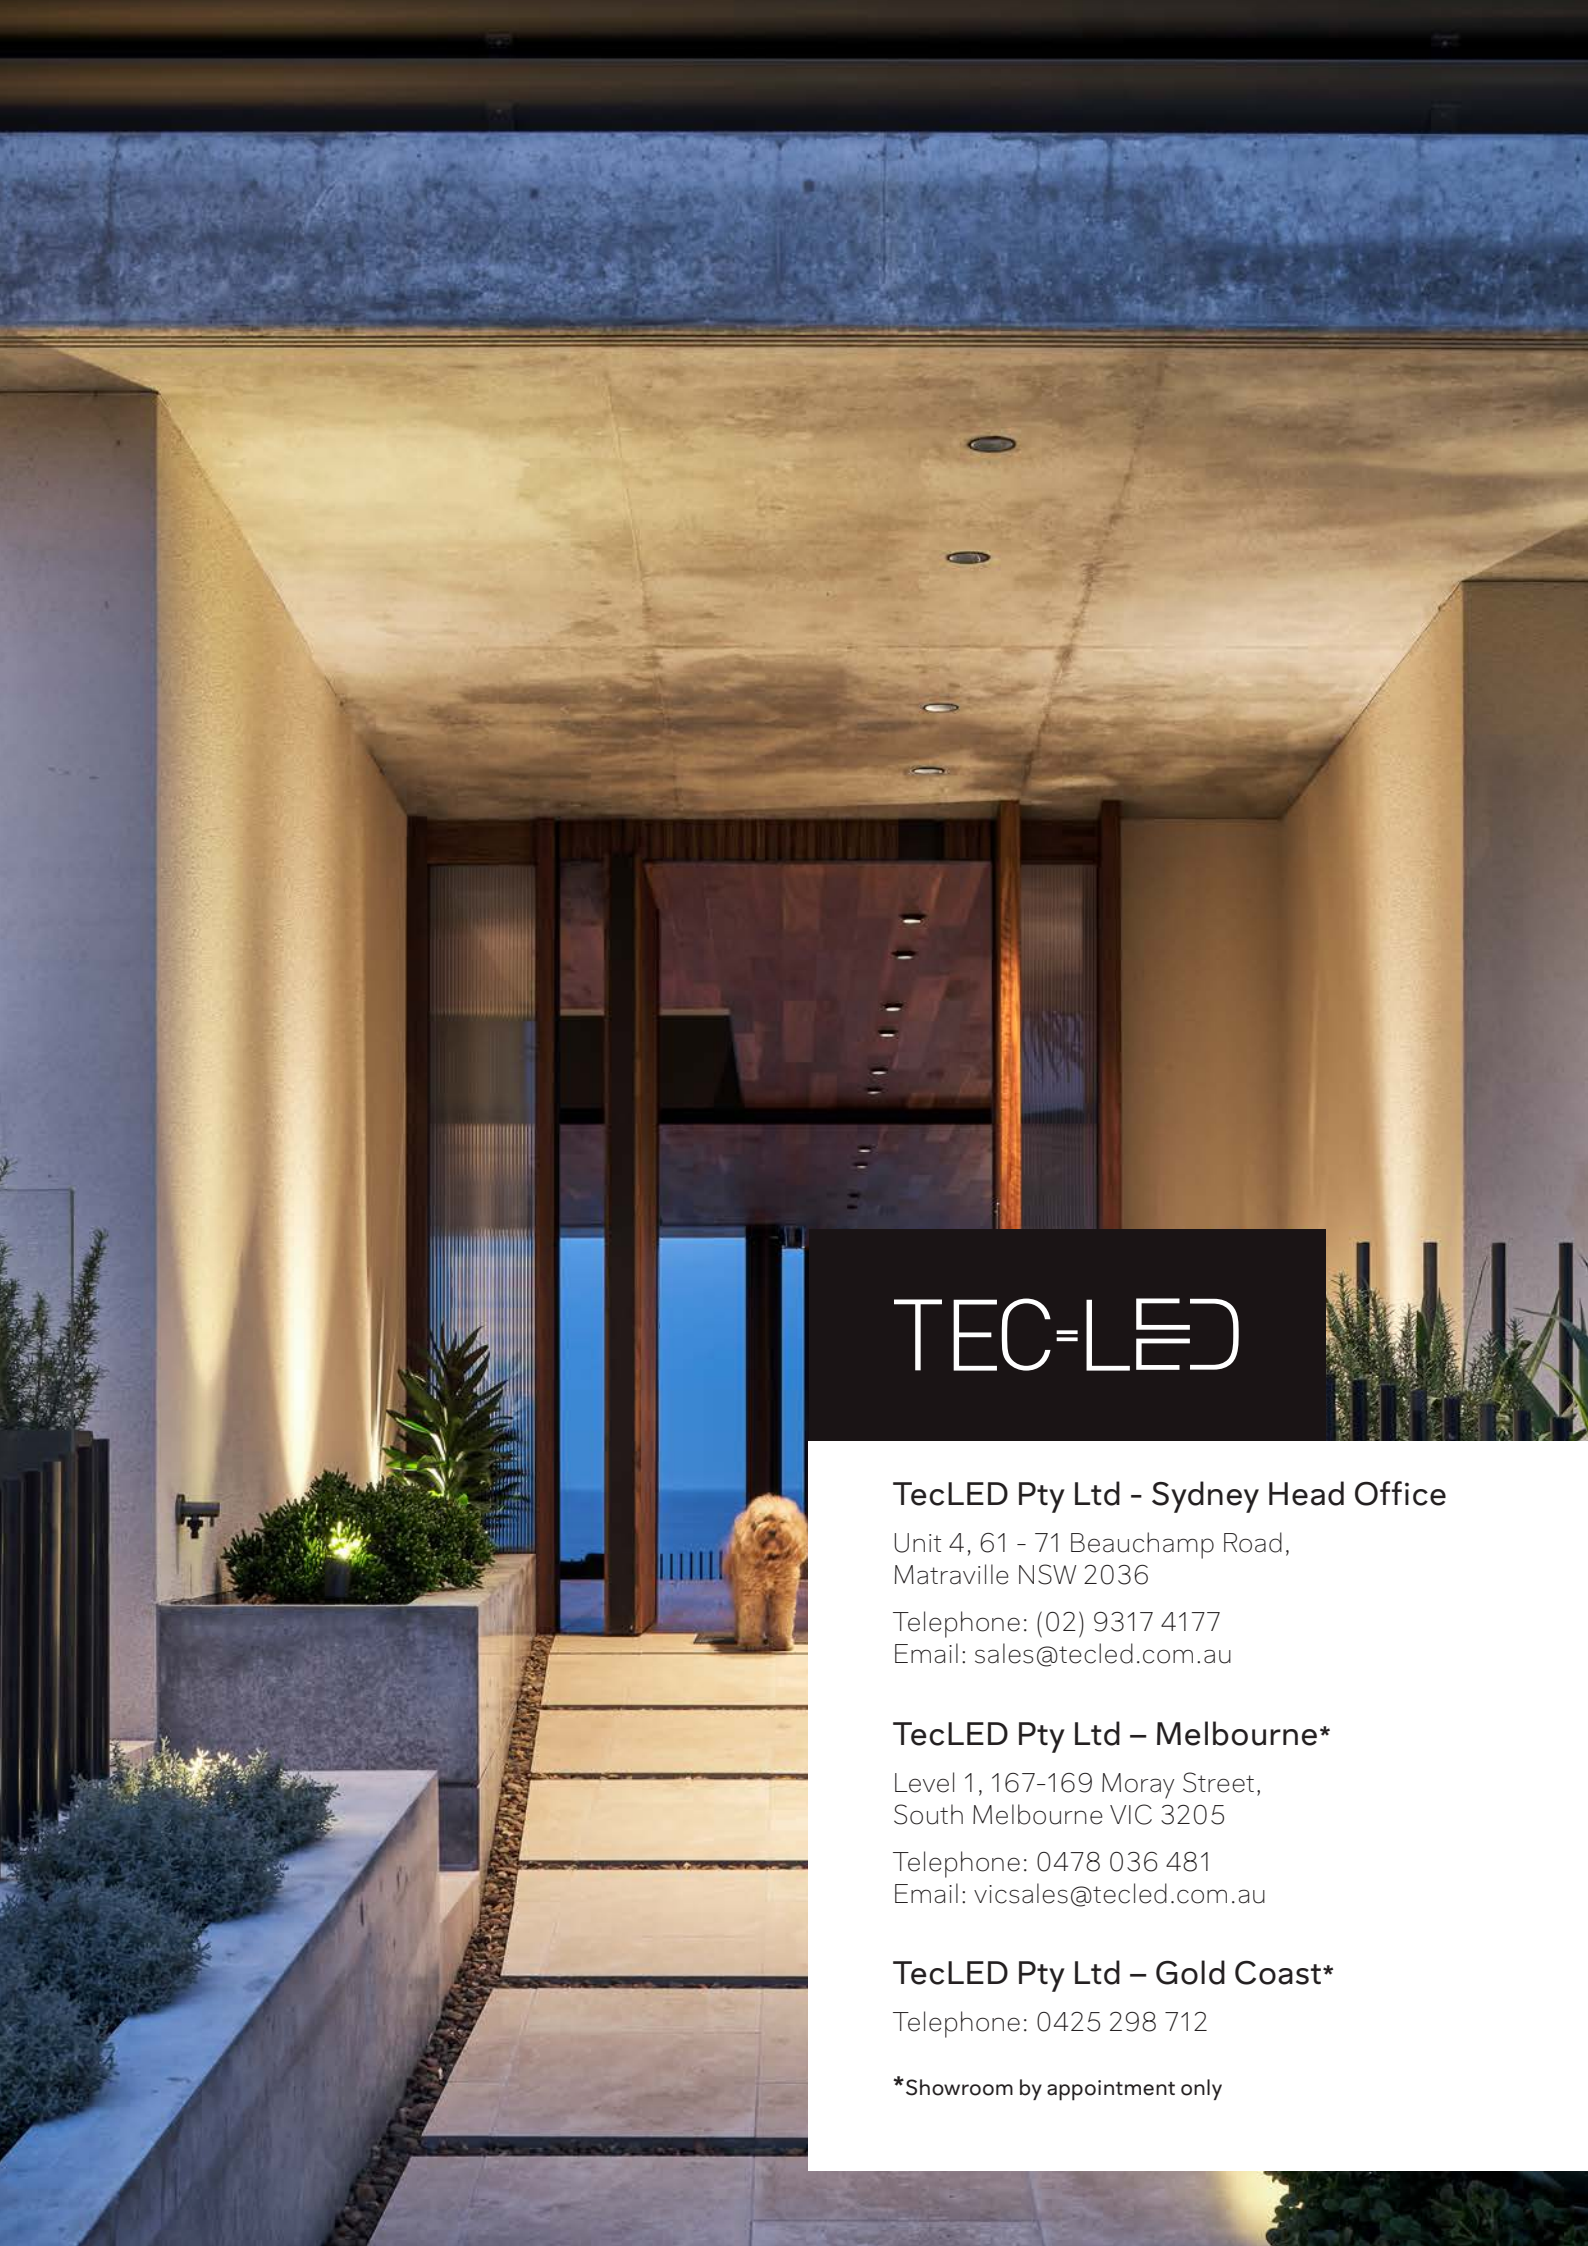A photograph of a modern architectural entrance at night. The scene features a large, illuminated concrete overhang with recessed ceiling lights. Below the overhang, a glass door leads into a building. A small, fluffy dog stands on a stone-tiled path leading to the door. To the left, there are concrete planters with greenery, some of which are illuminated from below. The overall atmosphere is warm and sophisticated.

TEC=LED

TecLED Pty Ltd - Sydney Head Office

Unit 4, 61 - 71 Beauchamp Road,
Matraville NSW 2036

Telephone: (02) 9317 4177

Email: sales@tecled.com.au

TecLED Pty Ltd – Melbourne*

Level 1, 167-169 Moray Street,
South Melbourne VIC 3205

Telephone: 0478 036 481

Email: vicsales@tecled.com.au

TecLED Pty Ltd – Gold Coast*

Telephone: 0425 298 712

***Showroom by appointment only**