



ZELA Fire Rated Tiltz Downlight

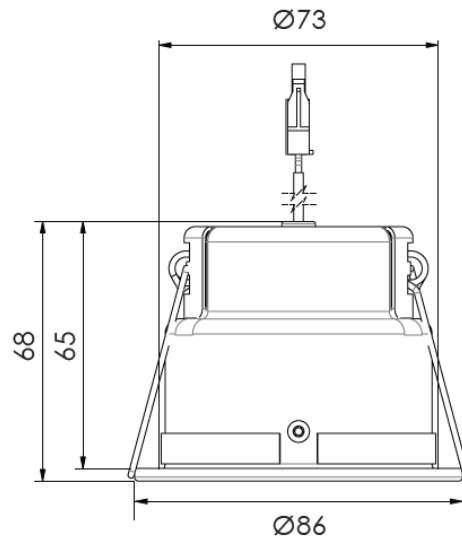

- IP65 (front face)
- Size 86x65mm
- Min cavity depth 190mm*
- Cut-out 73mm
- Tilt Angle 28°

*Fire Rated downlights must not be installed into a cavity of less than 190mm as tested to AS 1530.4:2014

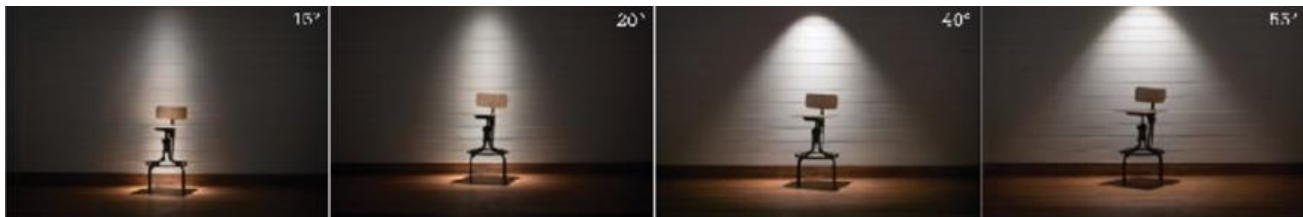

Diffuser options:



Lens diffuser
Beam 9° 15° 20°
Spot lighting



Prismatic diffuser
Beam 40° 55°
General lighting

Trim options:



Textured white



Textured black

15° only available in CCT 2700K, 3000K or 4000K

FITTING TYPE	CODE	W	BEAM ANGLE/LUMENS					IC	CCT	CUT-OUT	CRI	DIMMABLE	DIMENSIONS DIA x Height
			9°	15°	20°	40°	55°						
TILTZ	DLFRZTZ11W	11W	n/a	640-700	770-900	830-970	830-970	CA135	2400K 2700K 3000K 4000K	Ø73mm	>90	TRIAC DALI	Ø86 x 65mm
TILTZ S-DIM	DLFRZTZ11WSD		40°	55°					3000-1850K				
			740	710									



PURE COLOUR
HIGH CRI DOWNLIGHTS

L70
(60,000 h)

Warranty
5yr Driver

IP65

UGR<19
Ultra Low Glare



Get in touch

U4 / 61-71 Beauchamp Rd,
Matraville NSW 2036

02 9317 4177
0425 350 698

sales@tecled.com.au
Victoria@tecled.com.au

Follow us

