

TEC=LED


2024 COYL

KEY FEATURES

- Flexible Silicone Wall Washer.
- Vertical and Horizontal Bending. Perfect for installation on curved surface of various arcs.
- Various beam angles available: 15 °, 30 °, 50 °, 18*20 °, 20*35 °, 20*55 °.
- Versatile: for both indoors and outdoors.
- IP65 protected by durable silicone materials provides exceptional resistance to salt, acid and alkali corrosion, and UV resistance.
- Max run length of 5m.
- Hidden end caps design, easy to install.

PARAMETER

Ra	Ra80
SMD Type	2835
LEDs/m	24LEDs/m
Power/m	24W/M
Voltage	DC24V(23.5Vmin, 24.5Vmax)
CCT	2700K / 3000K / 4000K / 6500K
Lumens/Mtr	1780 / 1815 / 1950 / 1840
Max Reel Length	5000mm
Storage Temperature	-25° ~+40°
Unit Cut	41.5mm

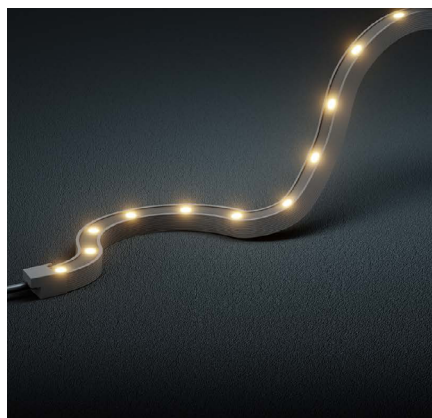

TEC=LED